


ULTRAMIZER PRO DSP1424P

Ultra high-performance digital multiband loudness maximizer / sound program enhancer powered by a 24-bit DSP

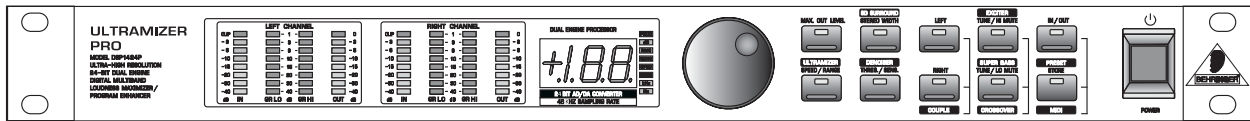

- ▲ Doubles the loudness of your recordings and sound reinforcement systems without any distortion
- ▲ Ultimate mastering machine maximizes signal energy with absolutely “inaudible” and transparent compression
- ▲ Variable band-split compression eliminates virtually any gain intermodulation effects, such as “bass pumping” etc.
- ▲ “Intelligent” digital limiter protects against any clipping and dangerous sound pressure levels
- ▲ Built-in denoiser and exciter for noise-free and ultra transparent sound
- ▲ 3D stereo surround processor provides unbelievable spatial enhancement and improved stereo imaging
- ▲ Super bass enhancer psycho-acoustically creates an incredible bass sound below your loudspeaker’s frequency range
- ▲ Incorporated leveler for constant average output level while retaining the instantaneous dynamics
- ▲ Free ULTRAMIZER software allows total remote control via PC—download at www.behringer.com
- ▲ 24-bit A/D and D/A converters with 64/128 times oversampling for ultra-high headroom and resolution
- ▲ Internal 24-bit processing with professional 46 kHz sampling rate
- ▲ Servo-balanced inputs and outputs on gold-plated XLR and TRS connectors for high signal integrity
- ▲ 50 programmable user presets for instant recall
- ▲ Accurate eight-segment LED level and gain reduction meters for optimum performance
- ▲ “Future-proof” software-upgradeable architecture
- ▲ Full MIDI capability allows real-time parameter control and program selection
- ▲ High-quality components and exceptionally rugged construction ensures long life and durability
- ▲ Manufactured under ISO9000 certified management system

SPECIFICATIONS

Analog inputs

Connectors	XLR and 1/4" TRS
Type	RF filtered, servo balanced input
Impedance	60 k Ω balanced, 30 k Ω unbalanced
Nominal operating level	-10 dBV to +4 dBu (switchable)
Max. input level	+16 dBu at +4 dBu nominal level, +2 dBV at -10 dBV nominal level

Analog outputs

Connectors	XLR and 1/4" TRS
Type	Electronically servo-balanced output stage
Impedance	60 Ω balanced, 30 Ω unbalanced
Max. output level	+16 dBu at +4 dBu nominal level, +2 dBV at -10 dBV nominal level

System specifications

Frequency response	20 Hz to 20 kHz, +/- 3 dB
Noise	> 94 dB, unweighted, 20 Hz to 20 kHz
THD	0.0075 % typ. @ +4 dBu, 1 kHz, Gain 1
Crosstalk	< -76 dB

MIDI interface

Type	5-pin DIN socket IN / OUT / THRU
------	----------------------------------

Digital processing

Converters	24-bit Sigma-Delta, 64/128-times oversampling
Sampling rate	46.875 kHz

Display

Type	2 1/2-digit numeric LED display
------	---------------------------------

Power supply

Mains Voltages	USA/Canada	120 V ~, 60 Hz
	U.K./Australia	240 V ~, 50 Hz
	Europe	230 V ~, 50 Hz
	General Export Model	100 - 120 V ~, 200 - 240 V ~, 50 - 60 Hz
Fuse	100 - 120 V ~: T 250 mA H	
	200 - 240 V ~: T 125 mA H	
Power consumption	10 Watts	
Mains connection	Standard IEC receptacle	

Physical

Dimensions (H x W x D)	1 3/4" (44.5 mm) x 19" (482.6 mm) x 7 1/2" (190.5 mm)
Net weight	approx. 2 kg
Shipping weight	approx. 3 kg

The information contained in this publication is subject to change without notice. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER is a registered trademark. ALL RIGHTS RESERVED.

© 2003 BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER Spezielle Studiotechnik GmbH, Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Münchheide II, Germany
Tel. +49 2154 9206 0, Fax +49 2154 9206 4903
